

Experiments and Analysis Advance R2100 Distance Sensors Used for Safety Systems of TOMI

Chunhua Zhao^{1,*}, Simon Blackmore^{2,3,*}, Sam Wane², Michael Warbrick²

¹Mechanical and Electronic Engineering College, Gansu Agricultural University, Lanzhou, China

²Engineering College, Harper Adams University, Newport, UK

³National Precision Agriculture Engineering Innovative Centre, Newport, UK

Email address:

zhaochunhau20121012@foxmail.com (Chunhua Zhao), simon.blackmore@harper-adams.ac.uk (S. Blackmore),

mwarbrick@harper-adams.ac.uk (M. Warbrick), swane@harper-adams.ac.uk (S. Wane)

*Corresponding author

To cite this article:

Chunhua Zhao, Simon Blackmore, Sam Wane, Michael Warbrick. Experiments and Analysis Advance R2100 Distance Sensors Used for Safety Systems of TOMI. *American Journal of Remote Sensing*. Vol. 8, No. 2, 2020, pp. 50-57. doi: 10.11648/j.ajrs.20200802.12

Received: October 12, 2020; **Accepted:** October 27, 2020; **Published:** November 4, 2020

Abstract: In order to increase safety systems reliability of TOMI harvester, it is necessary to use advance R2100 Distance sensors which can scan all kinds of targets and receive data from automatic control system. The Structure and function of R2100 Distance sensors were provided in this paper, In order to determine the best application function of the R2100, effectiveness of R2100 sensors used for TOMI robot with robotic cutting forage were tested and analyzed. For application in precision agricultural engineering automatic control safety systems, static tests were applied with a box, cylinder, cone and person as 4 target samples which were set at different points and lines with each segment at 8° angle within 11 segments, the target samples were set at 0°, 14°, 44°, 74° and 88° angles with the reference of the sensor at centre, respectively, samples represent obstacles such as tractors, telegraph pole, car, and person which were detected and received by TOMI equipped with R2100 Distance sensors. TOMI Robot equipped with R2100 sensors setting at 240, 420 and 850 mm height, respectively, were set location at about 0.2m, 0.3m, 0.5m, 1m, 1.5m, 2m, 2.5m, 3m, 3.5m and then added up to 0.5 m step up to 10 m with the reference of R2100 sensor in semicircle centre, respectively. In dynamistic testing, the target samples were set at the same method and location, and TOMI robot equipped with Advance R2100 sensors was running at speed of 0.8~1.2 m/s from 5 m to the test centre in dynamistic tests. Tests and statistical evaluate results showed that the average R² on TOMI robot was up to 98.96% in static tests, while the average R² is up to 98.67% in dynamistic test, and as far as TOMI robot's safety system, 420 mm height was the best location for scanning all kinds of obstacles. The experiment results showed that the Advance R2100 was accurate sensor for application, it had been carried out on TOMI's intelligence safety systems which more practical and safety working in various fields.

Keywords: Distance Sensor, Safety, Structure and Function, Data, Tests and Analysis

1. Introduction

It is well known that all sensors have advantages and disadvantages, two main factors should be considered before choosing Advance sensors: Reliability and economical Application function. Consider economical practical function as intelligent harvester named as TOMI using for cutting forage [1], knowledge of certain sensors can help users avoid obstacles [2], Development the safety systems of robot were used for harvester, which considered ensuring a successful sensing application [3-4], simplicities of mounting and setup

[5] Advance applications of R2100 sensors were showed that sending frame position detection: injection mold closure detection [7]; Lathe's automatic control such as float detection for flow control [8-9].

2. Structure and Function

OMD8000-R2100-R2-2V15 type of R2100 Distance sensors was used to test accurate with 3D direction scanning range of 88° and multi-beam LCD scanner using test Pulse Ranging and 3D valid max-distance, Structure and function were showed about pulse ranging technology (PRT) and

following application tests which boasting a wide field of coverage with from 0.2 to 2 m at bw 6% and from 0.2 to 8 m at wb 90% [10]. The eyes protection LCD technology in the sensor allows using in various working areas without posing danger. The 11 emitter elements were arranged side by side span scanning range of 88° as showing in Figure 1, while the emitter LCD isolates themselves by their large spots. Measuring the surface rather than a point makes it easier to measure on homogeneous surfaces. The absence of any parts or device, such as bearings or motor, makes the intelligence TOMI with 2 outputs A, B (respectively 3.3V and 5V with max 250 mA) and one input C (5V with max.100 mA) checking more complex, the restarting input can be allocated as restart or for changing fields. The power was supplied to the device using a plug-in connection box with a high enclosure rating, and the interface connection was made through another connection box (RS232). Effective pulse ranging technology (PRT) ensures reliable and stable 2D measurement results independent of the application environment. These made Advance R2100 sensors truly unique solution for a wide range of safety harvesting tasks [11].

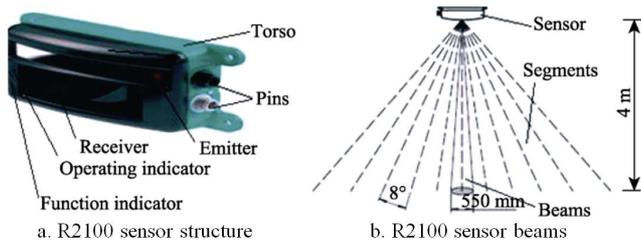


Figure 1. R2100 sensor structure and beam geometry.

The Advance R2100 Distance sensor using in the safety systems of TOMI may be described as “detecting R2100 Distance” from the center emitter to the position at which the proximity sensor operates when measured from the reference position with the standard detectable target. R2100 Distance sensor Scanning targets may not able to receive the manufacture’s data [12]. These targets may be independently tested and measured, and the accurate of detecting Advance R2100 Distance may be effected by others sensors which couple with using in precision agricultural engineering [13].

3. Materials and Methods

In order to increase the reliability in new safety systems of TOMI and ensure the safety systems are correct running with 2 multifunction control systems and safety control systems for TOMI, the Advance R2100 Distance sensors were connected RS232 with TOMI’s safety control system, it can send and request the obstacle's information, and received the echoes data, then, the information of R2100 Distances or echoes would be responded and received the information within 3s, the central electronics boards in safety control systems of TOMI were built, as showing in Figure 2.

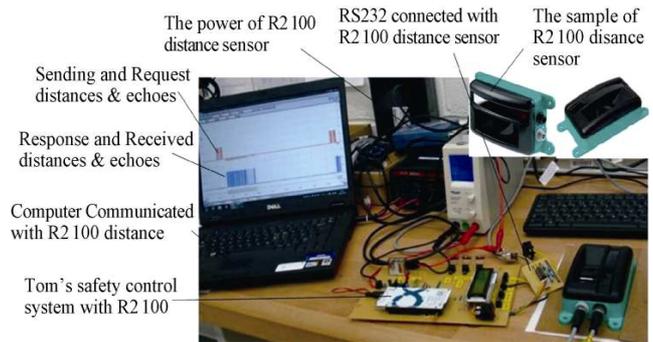


Figure 2. Static testing R2100 sensor using in TOMI's safety system with intelligence safety control systems.

3.1. Data Logger of Tests

Advance R2100 sensors such as OMD8000-R2100-R2-2V15 type of R2100 produced by Pepperl+Fuchs AG Ltd were used Figure 1 and 2 configurations for the serial ports [14].

3.1.1. Theory and Technical data of R2100 Distance Sensor

The baud rate of serial port is set to 19200 bps, using 8 bits and 1 stop bits, the resolution of R2100 sensor is up to 1 mm and, R2100 interface connection takes place through RS 232 with Intel Galileo, To evaluate the R2100 sensors, pulse ranging technology (PRT) and array of wide-beam LCD emitters are used as the measuring method in 2D with multi-beam scan–evaluating 2D area. Combining this technology with PRT is ensure to reliable detection of any surface, regardless of shape or size, R2100 can delivers extra durability, ruggedness, and measurement stability of R2100 Distances equipped with TOMI Robot.

Microprocessor which the type of Philips P87LPC762BN was produced by Philips, The Netherlands with functions of timer was used in static tests, once a pulse on the vibration sensor was detected, the microprocessor, switches of the circuit on for a pre-established time in via a constable stage were used in dynamistic tests. The FSK (frequency shift keying) modulation technique allows greater protection against electric noise compared to other types of RF modulations.

3.1.2. Communicating and Echoes to R2100 Sensor

Arduino and easy radio with functions of store program and transmission can receive data for serial interface board, it provides an easy to use, convenient communications to adapt or for shifting between RS232 serial protocol and TTL logic levels in dynamistic tests. The RF transmission module is a device based on TTL-RS232 logic (bit rate ranges from 9600 to 115200 bps), and data transmission is realized by the “store and forward” technique: input data are stored in a buffer memory and transmitted at the end of reception. In the reception phase, the bytes are stored and transferred to the serial port only after the check sum validation. In case of transmission failure, all received bytes are rejected (in other words, the radio message must be completely transmitted). The communication between the sensor and targets are based on frame messages using 4

bytes such as sender ID information and receiver accurate distance data, length of the complete frame and command has to be sent to the R2100, then, the R2100 sensor answers and responds R2100 Distances & echoes. By sending “AT” type commands of the communication channel, serial speeds, output transmission interval, power transmission and the identifying code can be selected by the user. To this end, for every triggering cycle, the same transmitter can be configured by using appropriate software. When the transmitter is powered, the transmission module receives the code which generated by microprocessor, then the code passes through the FSK modulator device, the high frequency created is amplified and filtered by a band-pass filter to eliminate all harmonic waves. Finally, the signal can be transmitted wirelessly.

Code generator, the microprocessor is generated through time programmable radio frequency serial hex code which made up of 49 bytes numerical characters. This preset universal code for each specific implement is generated by micro process or triggered by the vibration sensor at a pre-defined frequency (commonly 1 code every 30 s). Scanning rate is 50 s^{-1} (1 scan is equal to 11 segments of a beam measurements).

3.2. Sending and Request About R2100 Sensor

R2100 Distance sensor send and request the frame which has 5 bytes: 0x01, 0x05, 0x59 and 0x83 from byte 0 to byte 4 respectively, this request should not be sent more often than every 20 m/s, and results reference only non-overlapping components are requested with 50 m/s.

3.3. Response and Receiver R2100 Distances

There are 50 bytes R2100 Distances and echoes data from byte 0 to byte 49, it may be received data, the first 4 bytes which have 0x01, 0x05, 0x32 and 0x11 from byte 0 to byte 3 are used as the sensor starting answers frame, the end byte 49 are used as the end frame number, if a beam does not detect a target, the corresponding R2100 Distance echo values are reported as 0xffff which means the beam does not detect the target, and it described the echo values as binary number of 1111 1111 1111 1111, then, the Advance R2100 values were transferred by programs using for TOMI robot's safety system, R2100 sensors and easy radio response, communicate the Advance R2100 application values which can each other transfer tests data hexadecimal number into decimalize, as the result of thousands data were received and statistic, then, the first author analyzed and gotten the conclusion such as Table 1 and Table 2.

3.4. Experimental Methods

R2100 Distance sensors were used and tested in cement space and forage fields where lie on outside of the Precision Agriculture Engineering innovative Centre in UK and in the laboratory of Engineering college, Harper Adams University, such as Figure 3, Considering practical circumstance, five advance R2100 Distance sensors were used on TOMI Robot [10-15]. Before static and dynamic testing, Tests planning

need design and write such as testing steps and testing methods, and Static tests were showed as Figure 4: a box, cylinder, cone and person were used as 4 target samples, which were set at various points and lines at 0°, 14°, 44°, 74° and 88° angles with the reference of the Advance R2100 sensor at center, and target samples represent as scanning obstacle such as vehicle, telegraph pole, pet and person, respectively.



a. Static tests



b. Dynamic tests

Figure 3. Photos of statics tests and dynamistic tests of TOMI robot equipped with Advance R2100 sensors.

Advance R2100 Distance sensors were set at 240, 420 and 850 mm height, respectively, and the 4 targets were classified into static tests and dynamistic tests. Static tests are aimed to detecting the response and received information between 4 target samples and R2100 Distance sensors. Dynamistic tests were aimed to detecting the response and received data about between advance R2100 Distance sensors equipped by TOMI at average velocities 1 m/s and other obstacles such as tractors working in fields, and 4 target samples, the different detecting response and received data between dynamistic tests and static tests were carried out, by paralleling x-y axis to center axis, the dynamistic vibration amplitude of TOMI equipped with

advance distance sensor can be received and echo when TOMI was working in fields. Tests results showed that dynamistic tests were more complex and accurate for safety advance R2100 distance sensor using for TOMI robot. The results of dynamistic testing TOMI were affected by the 3D location of R2100, velocities and target samples' angular such as Table 2 and Figure 4.

Table 1. Distances of R2100 sensor in static tests (mm).

Target	Target Size (L×W×H)/mm	Height of R2100 Distance sensor/mm		
		240	420	850
Cone	∅50x∅220x520	10000	10000	0.00
BOX	420x420x800	5000	5200	0.00
Person	300x150x1650	2800	3500	4 500
Cylinder	∅50x950	2100	2200	0.00

Table 1 showed that setting the R2100 sensor used cutting grass on the height of 420 mm would be working in fields better than setting on the height of 240 mm and 850 mm.

4. Results Analysis

4.1. Testing Plan

Firstly, Testing R2100 Distance sensor's application function: The target was put in the center line at 10m, 8m, 6m, 5m, 4m, 3m, 2m, 1m, 0.5m, 0.4m, 0.3m and 0.2m respectively, such as dot marks in Figure 4, than, check the safety system about TOMI robot, if it was not stop, that means the R2100 distance sensor did not detect the obstacles; If TOMI immediately stop, that means the R2100 had detected obstacles; continue to check the second segment and get detail information. Secondly, check the left and right of R2100 sensors following the tests plan: such as Figure 2, Figure 3 and Figure 4, static and dynamic tests steps: put the several targets from 0.2 m to 10 m in static tests and the angle is 0°, 14°, 44°, 74° and 88° with the horizontal line,

If TOMI robot does not stop in dynamic tests, the target can put TOMI Robot's front at 10m, 9m, 8m, 7m..... 2m, 1m, 0.5, 0.3m and 0.2m in working platform, than scanning and checking that; if TOMI robot is stop, that means the advance R2100 Distance sensor echoes and receives data, then, continue to check the other TOMI's R2100 sensor using the similar method; Third, check the segments of R2100, Target was put at one side of TOMI Robot's front at 10m,..... 4 m, 3 m, 2 m, 1 m, 0.5 m, 0.3 m and 0.2 m as following Figure 4, if TOMI equipped with the advance R2100 sensor is not stop, than, the target can go ahead setting at equivalent distant points and lines with divided by each segment at 8° angle within 11 segments and checking that, if TOMI robot is stop, that means the target's distance has accurately echo, receive the data and the target continue can set at 5, 4, 3, 1 segments to right front R2100 Distance sensor, respectively, than continue to check that with the similar method; If TOMI is immediately stop, that means the target is located at the 7, 8, 9, 11 segments. Lastly, more detailed information about the two front R2100 Distance sensors can be set, and which segment is linked with the target, following Figure 3 and Figure 4, it was divided 88°

into 11 parts with 12 lines and 11 segments which each segment is about 8°, then, following the above steps and checks the other R2100 Distance sensors.

In the dynamistic tests, the practical fields of working conditions were imitated [12] and TOMI robot was run at 1 m/s up to the center of semicircle map, then, following the static tests plan and test diagram to continue the dynamistic tests, the results of tests was shown in the Table 1, Table 2 and Figure 4.

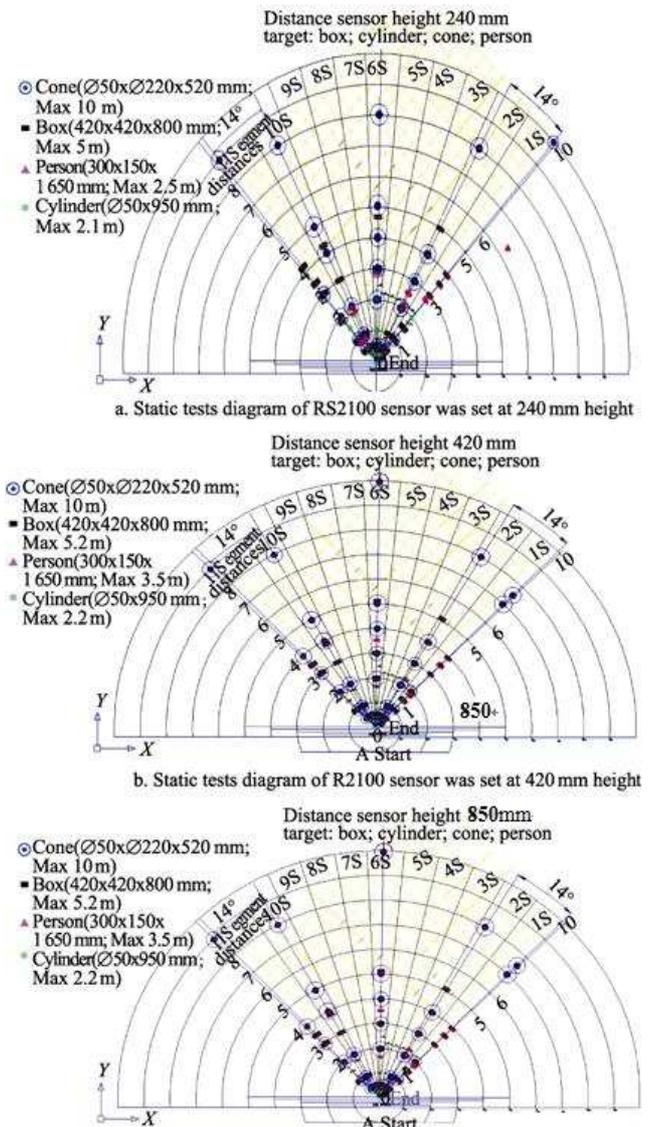


Figure 4. Responded and received dots data in Static tests diagram of R2100 sensor was set at the height of 240 mm, 420 mm and 850 mm, respectively (1~10 means equal to from 1m to 10m; 1S~11S means Advance R2100 distance sensor's segments)

4.2. Test Results and Evaluate

TOMI robot's static tests were carried out by setting at 240 mm, 420 mm and 850 mm height, and the target samples were set at 0.2 m, 0.3 m, 0.5 m, 1 m, 1.5 m, 2 m, 2.5 m and then with added up to 0.5 m step up to 10 m with the reference of the

Sensor height/mm	Target	Angle/(°)	R2100 Distance value/mm	1	2	3	4	5	6	7	8	9	10	11	
240	cone	0	900 0	9 192.00	-	-	-	-	-	-	-	-	-	-	
		14	900 0	-	9 682.33	-	-	-	-	-	-	-	-	-	
		74	900 0	-	-	-	-	-	-	-	-	9 912.67	-	-	
		88	500 0	-	-	-	-	-	-	-	-	-	5 560.00	5 461.00	
420	cone	0	800 0	-	9 096.00	-	-	-	-	-	-	-	-	-	
		88	900 0	-	-	-	-	-	-	-	-	-	-	9 528.50	
		0	1000 0	-	1 0424.00	-	-	-	-	-	-	-	-	-	-
		0	800 0	-	8 618.00	-	-	-	-	-	-	-	-	-	-
850	cone	0	450 0	-	56 36.00	-	-	-	-	-	-	-	-	-	
		0	300 0	-	-	4 024.00	-	-	-	-	-	-	-	-	
	0	100 0	-	1211.00	1 259.00	-	-	-	-	-	-	-	-	-	
	44	800 0	-	-	-	-	-	-	8 425.50	-	-	-	-	-	
	44	600 0	-	-	-	-	-	-	6 666.00	-	-	-	-	-	
	44	400 0	-	-	-	-	-	-	4 734.00	-	-	-	-	-	
		44	400 0	-	-	-	-	-	4 497.00	-	-	-	-	-	

Note: "-" means scanning nothing.

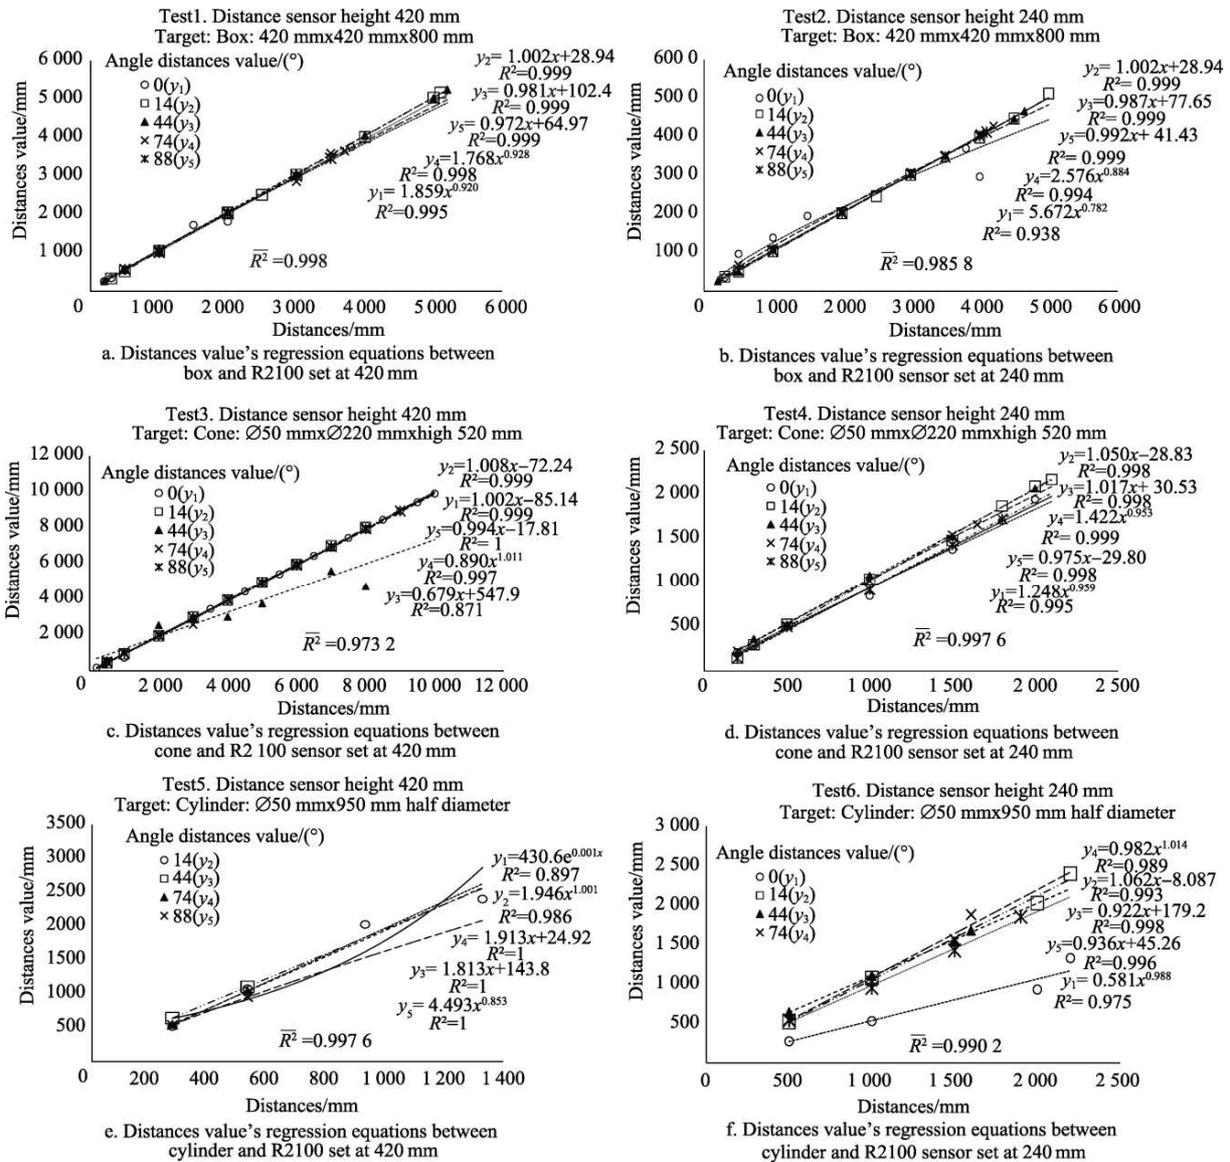


Figure 5. Relationship between a box, cylinder, cone, person targets and R2100 sensors in static tests.

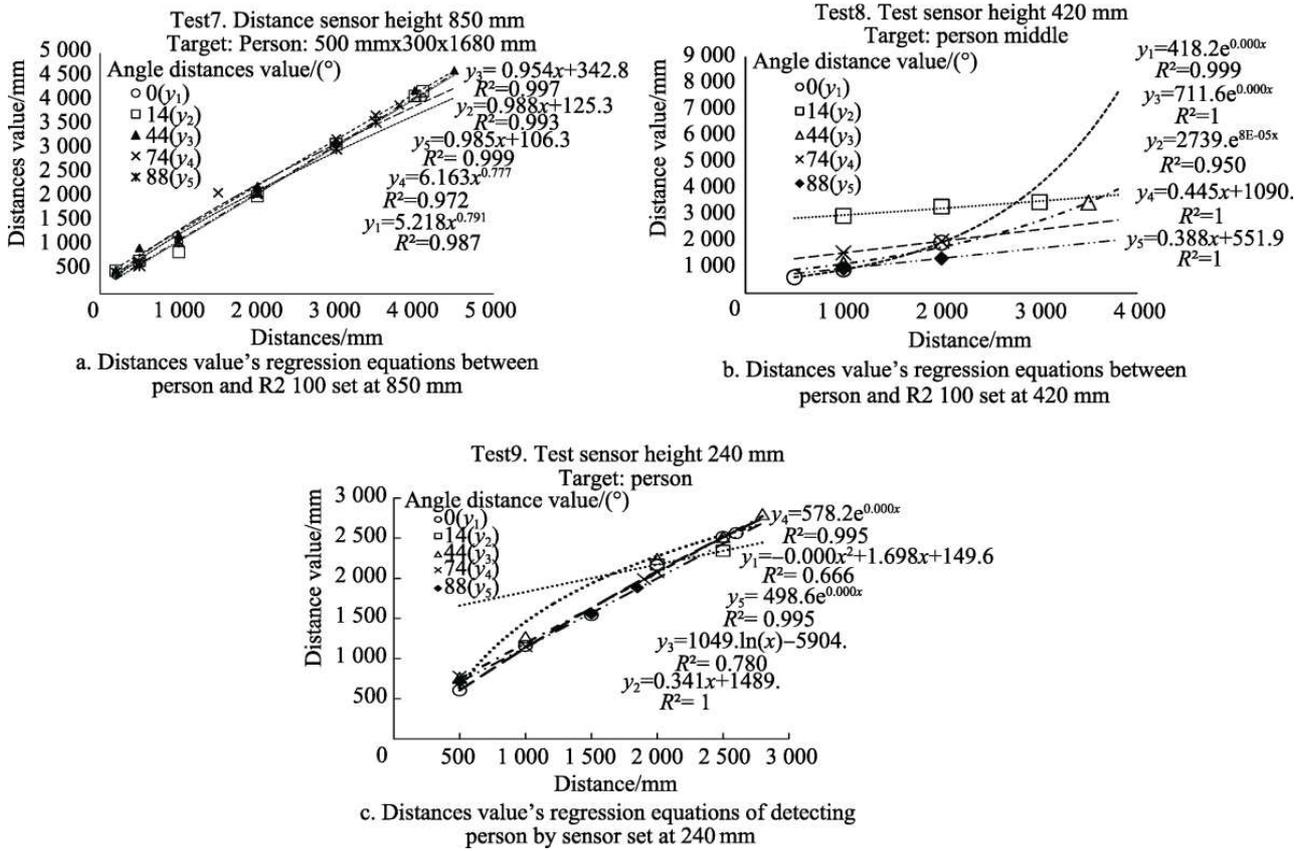


Figure 6. Relationship between person as target and Advance R2100 sensor in dynamic tests.

3) Above all, the results showed that the Advance R2100 sensor is accurate and reliability for detecting various target obstacles in fields. Evaluation the Advance R2100 distance sensor's object were carried out, scanning object tasks were designed according to the spot, shape and size of detectable objects. If target sample is not standard size, the greater tolerance would be obtained such as Table 2. If a smaller object is to be detected, the inductive proximity sensor requires detecting the Advance R2100 Distance in the specification situation. Researching harvester equipped with Advance R2100 Distance sensors are suggested to detect and echo the best location for scanning and echo obstacles.

Acknowledgements

ZHAO CHUNHUA would like to thanks for Professor Simon Blackmore and all of staffs in Engineering College at Harper Adams University, C.H also thanks Y.X for transferred thousands testing hexadecimal Data numbers into decimalize and Statistic them; the research had been carried out at national precision Agriculture Engineering innovative Centre in UK. The paper would be funded by Research and Development of main Project in Gansu Province; National Natural Science Foundation of China; Special Fund for Agro-scientific Research in Public Interest and FXRC outstanding talent project in Gansu province.

References

- [1] Chunhua Zhao, Material Analysis Structural Study on powering Divider of Herbage Harvester [J]. Environmental Science Material Application, 2012, 148-151.
- [2] Products introduce, Bumper-datasheet, on Apr, 2014.
- [3] E. J. Van Henten D. Goense C. Lokhorst. Precision agriculture rest Wageningen Academic Publishers. Papers presented at the 7th European Conference on Precision Agriculture [C], the Netherlands 6-8 July, 2009.
- [4] Starks P J, Zhao D, Phillips W A, et al. Development of canopy reflectance algorithms for real-time prediction of Bermuda grass pasture biomass and nutritive values [J]. Crop Science, 2006, 46 (2): 927-934.
- [5] Zhou Zhiyan, Zang Ying, Luo Xiwen, et al. Technology innovation development strategy on agricultural aviation industry for plant protection in China [J]. Transactions of the Chinese Society of Agricultural Engineering, 2013, 29 (24): 1-10.
- [6] An Xiaofei, Fu Xinglan, Meng Zhijun, et al. Grain yield data transformation model based on photoelectric principle and its validation [J]. Transactions of the Chinese Society of Agricultural Engineering, 2017, 33 (Supp. 1): 36-41.
- [7] Omron Electronics LLC, Safety Product Marketing Manager, Your Inductive Proximity Sensor Strategy: The Technology, Specification, and Implementation of Authored by Reno Sufi [EB/OL], 2013-12-02 [2014-01-12]. <http://www.measurements.com>.

- [8] Ma Y. L., Liu D. X., Robots; Flexible Manufacturing Systems and Computer-integrated Manufacturing, Unite 24 and 26 of Special English for Mechanical design and automatic manufacture [M]. Beijing, Chemistry factory publisher, 2006, 7.
- [9] Ma Y. L., Liu D. X., Computerized Numerical Control and Numerical Control Applications, Unite 22 and 23 of Special English for Mechanical design and automatic manufacture [M]. Beijing, Chemistry factory publisher, 2006, 7.
- [10] www.PEPPERL-FUCHS.com, products introduce, R2100 data sheet, on July, 2014.
- [11] Zhou J, Cong B, Liu C. Elimination of vibration noise from an impact-type grain mass flow sensor [J]. Precision Agriculture, 2014, 15 (6): 627-638.
- [12] Polulu. 2014. R2100 Products of Pepperl+Fuchs AG Ltd. [on-line] Available from: <http://www.pololu.com/>[Accessed July 2014].
- [13] Taylor <http://groups.google.com/group/ieee-tc-agricultural-robotics>, [Accessed Mar, 2014].
- [14] Li, Z., Wang, N., Hong, T. Radio path-loss modeling for a 2.4 GHz in-field wireless sensor network [J]. Trans. ASABE53 (2), 2010, 615-624.
- [15] Mazzetto, F, Calcante, A, Salomoni, F, 2007. A low cost system for the automatic monitoring of slurry distribution activities: the MOSAICO project [C]. In Poster paper proceedings of 6 European Conference of Precision Agriculture (6ECPA), Skiatook, Greece.
- [16] Blackmore, B. S. et al., 2004b. Development of a deterministic autonomous tractor. Beijing, CIGR International Conference.
- [17] Srivastava. Ajit K., Carroll E. Goering, Roger P. Rohrbach, and Dennis R. Buckmaster. 2006. (rev.) Precision agriculture. Chapter 6 in Engineering Principles of Agricultural Machines, 2nd ed., 123-138. St Joseph, Michigan: ASABE, Copyright American Society of Agricultural and Biological Engineers.
- [18] Sugahara, K., Nanseki, T., Fukatsu, T. Verification of a prototype system to. In: Proceedings of World Conference on Agricultural Information and IT [C], IAALD AFITA WCCA 2008, Tokyo, Japan, 2008, pp. 215-220.
- [19] Van Herten, E. J., Goense, D., Lokhorst, C.: Precision agriculture' 09. In: Papers Presented at the 7th European Conference on Precision Agriculture Wageningen, Wageningen Academic Publishers, The Netherlands, 6-8 July 2009.
- [20] Rodrigo, S., Jamisola, Jr., Anthony, A: A path planning strategy for kinematically redundant manipulators anticipating joint failures in the presence of obstacles. In: Proceedings of the 2003 IEEE/RSJ International Conference on Intelligent Robots and Systems as Vegas, Nevada, Oct 2003.
- [21] Kang, S. C., Chang, W. T.: Robot Development Using Microsoft ROBOTICS Developer Studio. Taylor & Francis Group, Boca Raton (2011).
- [22] Blackmore, B. S., Fountas, S., Have, H.: System requirements for a small autonomous tractor. CIGR J. Sci. Res. Dev., p. Manuscript PM 04 001, July 2004 (2004a).
- [23] R2100-datasheet. <https://www.google.co.uk/Robotics>, D.: 3DR Pixhawk. <https://store.3drobotics.com/products/3dr-pixhawk> (2014). Accessed 10 Apr, 2014.
- [24] Active Robots: 2013. Fircelli. Active Robots Limited. <http://www.active-robots.com/brands/fircelli> (2014). Accessed 14 May 2014.
- [25] Shoji K, Miyamoto M. Improving the accuracy of estimating grain weight by discriminating each grain impact on the yield sensor [J]. Precision Agriculture, 2014, 15 (1): 31-43.
- [26] Chung SO, Choi M C, Lee K H, et al. Sensing technologies for grain crop yield monitoring systems: [J]. Journal of Biosystems Engineering, 2016, 41 (4): 408-417.
- [27] Robots and robotic devices - Safety requirements for industrial robots-Reference number: ISO 10218-1: 2011 (E).